

POWER SUPPLY


3 & 2 - 18vac transformer power supply input
 A or 1 (+) & C or 4 (-) - 24vdc power supply output

FUNCTIONAL OPTIONS	Cut Jumper	Timer Board Req'd Cut Yellow Jumper or Remove JP1 *	INPUT OPTIONS				
			Terminal Screws	Input Board Req'd Cut Blue Jumper or Remove JP2 *	Cut Black Jumper	Change Relay R11	Add Capacitor C12
Dry Contacts			A & B				
Maintained				X			
Wet Contacts			B(+) & E(-)	X	X		
Less than 24V			B(+) & E(-)	X	X	X	
AC Voltage			B(+) & E(-)	X	X		X

AUXILLARY OUTPUT OPTIONS	24vdc Wet Output	Dry Output	Input Board Req'd Cut Blue Jumper or Remove JP2 *
Follow Output Relay	Jumper C & Com 1(+) & NC(-) or NO(-)	Com & NC or NO	
Follow Reset Sw.	1(+) & D(NO-)		

* When an input board is used with a timer board, install a jumper between the two header pins on the timer board.

Note: This control Board may be powered by 24 VDC instead of the 18 VAC transformer. Connect the +Positive 24 VDC to terminal # 1 and the -Negative 24 VDC to terminal # 4.

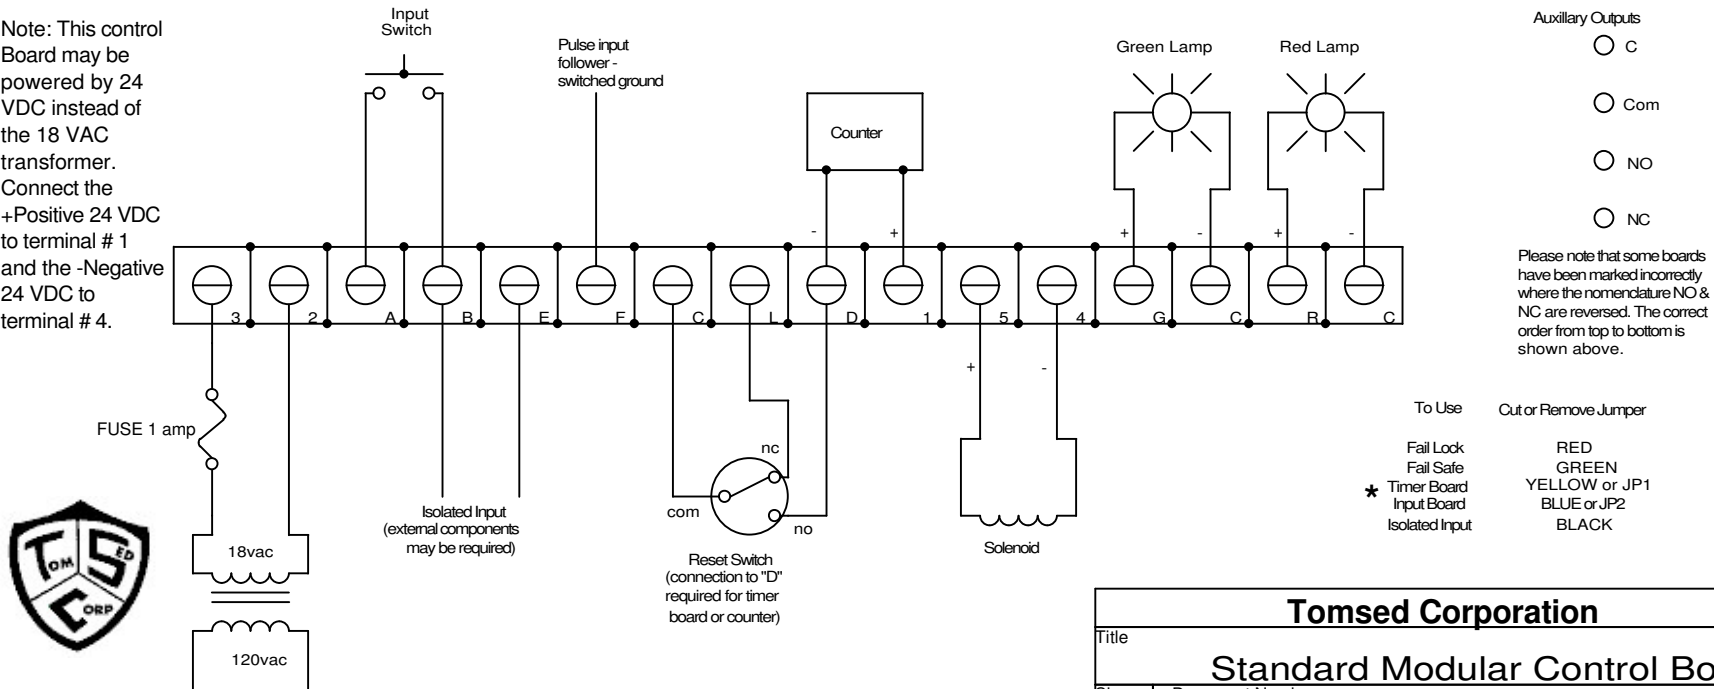

Tomsed Corporation

Title: **Standard Modular Control Board**

Size: A	Document Number: Wiring & Configuration Design: AWG	Rev: 6C
Date: Thursday, November 30, 1995	Sheet: 2 of 2	